

FURUNO

MODEL **FA-40/70**
AIS RECEIVER/CLASS B+ TRANSCEIVER



FA-40 AIS Receiver
FA-70 Class-B+ AIS Transceiver



www.furuno.com



**NMEA2000
Certified**

KEY FEATURES:

- Silent Mode with optional ON/OFF switch
- Compact and light with wider range and faster transmit performance*
- Internal VHF splitter eliminates need for separate antenna*
- Switchable SO-TDMA and CS-TDMA*
- NMEA2000 port, 2x NMEA0183 ports and a USB (micro B) port
- Initial setup can be done through the NMEA2000 network (TZT2/TZT3)

*FA-70 ONLY

MODEL FA-40/70
AIS RECEIVER/CLASS B+ TRANSMITTER


The FA-40/70 AIS receives the vessel's AIS information and other useful information from Class-B+ AIS that transmits your vessel's information at faster rates than typical Class B units. The FA-40/70 also guarantees an AIS time slot allocation, reducing the risk of collision.

SUPERBLY ACCURATE INFORMATION EXCHANGE


MODEL	DYNAMIC DATA	STATIC DATA	VOYAGE RELATED DATA
FA-40 INFORMATION TO BE RECEIVED	<ul style="list-style-type: none"> • Ship's position • Coordinated Universal Time (UTC) • Course Over Ground (COG) • Speed Over Ground (SOG) • Rate Of Turn (ROT) • Heading • Navigation status 	<ul style="list-style-type: none"> • MMSI (Maritime Mobile Service Identity) • IMO number • Ship's name • Ship's type • Call sign • Length and beam • Location of position-fixing antenna on ship 	<ul style="list-style-type: none"> • Ship's draft • Hazardous cargo • Destination and ETA
FA-70 INFORMATION TO BE RECEIVED AND TRANSMITTED	<ul style="list-style-type: none"> • Ship's position • Coordinated Universal Time (UTC) • Course Over Ground (COG) • Speed Over Ground (SOG) • Rate of Turn (ROT)* • Heading <p>*If transmitted by remote AIS</p>	<ul style="list-style-type: none"> • MMSI (Maritime Mobile Service Identity) • IMO number • Ship's name • Ship's type • Cargo • Call sign • Length and beam • Location of position-fixing antenna on ship 	

VHF/AIS ANTENNA


PC (testing and setup only)

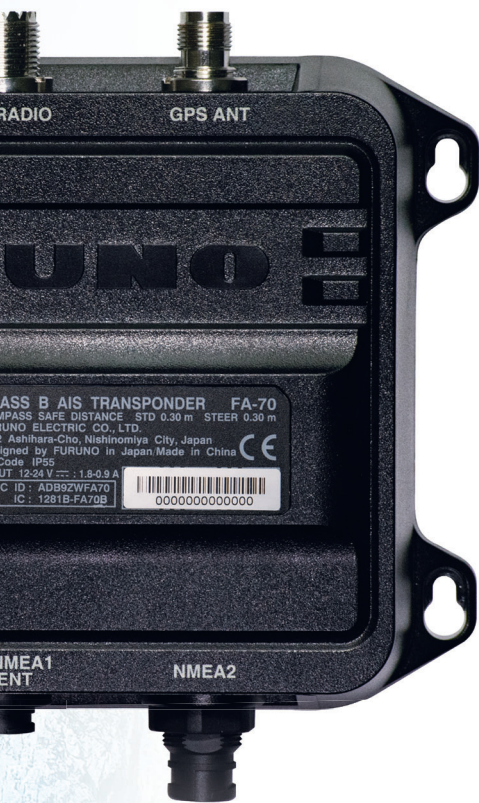

The Automatic Identification System (AIS) improves the safety level of boating by exchanging information about the status of your ship with other AIS-equipped craft nearby.

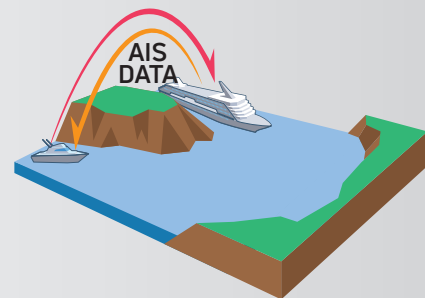

Simply tap on an AIS target to reveal critical information: Ship's name, COG, SOG, CPA, TCPA, Range and Bearing.

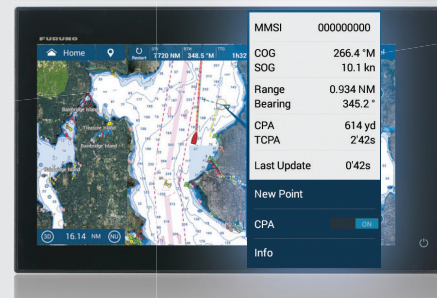

0/70


CLASS B+ TRANSCEIVER

AIS targets are fully visible and predictable when interfacing with a compatible Furuno Radar.



Ship name, call sign, position, COG, SOG, and bearing of surrounding vessels. The FA-70 is a Class B+ transceiver that provides vessel information at higher power & range than Class B. It offers 12.24W for added awareness. SO-TDMA technology makes you visible in congested waters.

AND SIMPLE SETUP WITH NMEA2000/NMEA0183

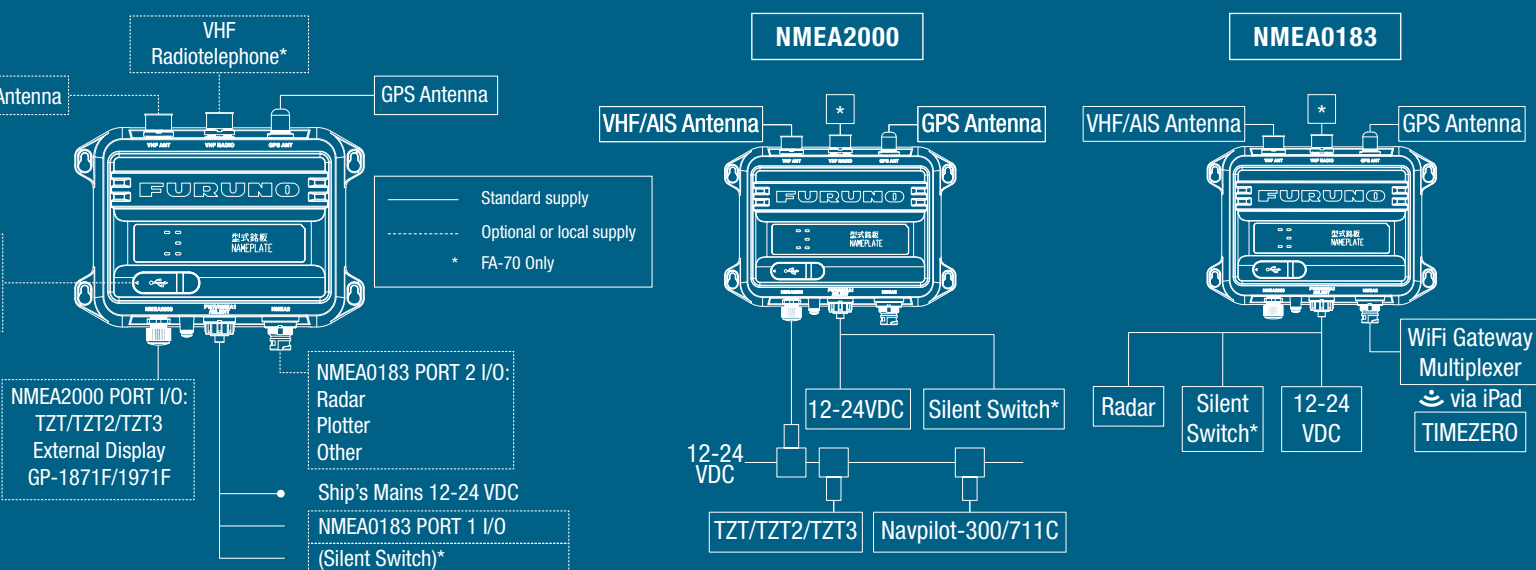

MODEL		AIS RECEIVER	CLASS-B+ AIS TRANSCEIVER
		FA-40	FA-70
STANDARDS			
		EN 303 413 V1.1.1, EN 301 843-1 V2.2.1 IEC 60945 Ed.4+CORR.1 IMO MSC.140 (76) ITU-R M.1371-5 IEC 62368-1 Ed.3	
		DSC: ITU-R M.825-3 IEC 62287-1 Ed.3.0, IEC 62287-2 Ed.2.0, IEC 62311 Ed.1+Ed.2	
TRANSPONDER UNIT			
TX/RX Frequency (FA-40/70: RX Frequency)			
Output Power	FA-40 Receive Only	Selectable: 5W or 1W (SO-TDMA), 2W (CS-TDMA)	
Channel Spacing	25 kHz		
GPS RECEIVER			
Receiving Channels	12 channels, SBAS 2 channels, 14 satellites tracking		
Rx Frequency	1575.42 MHz		
Rx Code	C/A code		
Position Accuracy	13 m (2 drms, HDOP <= 4)		
INTERFACE			
NMEA0183	Input - 2 Ports	ACA, ACK, AIQ, DTM, GBS, GGA, GLL, GNS, HDT, OSD, RMC, SSD, THS, VBW, VSD, VTG	ABM*, ACK, AIQ, BBM*, HDT, SSD, THS, VSD *(ABM, BBM: SO-TDMA only)
	Output - 2 Ports	ABK, ACA, ACS, ALR, GGA, GLL, RMC, SSD, TXT, VDM, VDO, VER, VSD, VTG	
NMEA2000	Input - 1 Port	059392, 059904, 060160, 060416, 060928, 065240, 126208, 127250	
	Output - 1 Port	059392, 059904, 060928, 126208, 126464, 126992, 126993, 126996, 126998, 127258, 129025, 129026, 129029, 129038, 129039, 129040, 129041, 129540, 129792, 129793, 129794, 129795 ¹ , 129796, 129797, 129798, 129800 ² , 129801, 129802, 129803, 129804 ¹ , 129805, 129806, 129807, 129809, 129810, 129811, 129812 ¹ , 129813 ³ ¹ (FA-40/FA-70: SO-TDMA mode only) ² (FA-40: SO-TDMA mode only), ³ (FA-70: SO-TDMA mode only)	
ENVIRONMENT			
Temperature	Antenna Unit	-25°C to +70°C	
	Other Units	-15°C to +55°C	-15°C to +55°C
Waterproofing	Antenna Unit	IP56	
	Other Units	IP55	
POWER SUPPLY			
Transponder Unit (FA-40: Receiver Unit)	12-24 VDC, 0.3-0.2 A		12-24 VDC, 1.8-0.9 A
UNIT DIAGRAMS			
FA-40 AIS Receiver Unit 0.45 kg (1.0 lbs)		FA-70 Transceiver Unit 0.52 kg (1.1 lbs)	
Catalog No. 1-A-20033LB CA000001428			
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE			
FURUNO ELECTRIC CO., LTD. Japan www.furuno.com FURUNO U.S.A., INC. U.S.A. www.furunousa.com FURUNO PANAMA S.A. Republic of Panama www.furuno.com.pa FURUNO (UK) LIMITED U.K. www.furuno.co.uk FURUNO NORGE A/S Norway www.furuno.no	FURUNO DANMARK A/S Denmark www.furuno.dk FURUNO SVERIGE AB Sweden www.furuno.se FURUNO FINLAND OY Finland www.furuno.fi FURUNO POLSKA Sp. z o.o. Poland www.furuno.pl FURUNO DEUTSCHLAND GmbH Germany www.furuno.de	FURUNO FRANCE S.A.S. France www.furuno.fr FURUNO ESPAÑA S.A. Spain www.furuno.es FURUNO ITALIA S.R.L. Italy www.furuno.it FURUNO HELLAS S.A. Greece www.furuno.gr FURUNO (CYPRUS) LTD Cyprus www.furuno.com.cy	FURUNO EURUS LLC Russian Federation www.furuno.ru FURUNO SHANGHAI CO., LTD. China www.furuno.com/cn FURUNO CHINA CO., LTD. Hong Kong www.furuno.com/cn FURUNO KOREA CO., LTD Korea FURUNO SINGAPORE Singapore www.furuno.sg
PT FURUNO ELECTRIC INDONESIA Indonesia www.furuno.id FURUNO ELECTRIC (MALAYSIA) SDN. BHD. Malaysia www.furuno.com/my BEWARE OF SIMILAR PRODUCTS All brand and product names are trademarks, registered trademarks, or service marks for their respective holders. SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE Printed in U.S.A.			